
8" DISCHARGE SUBMERSIBLE TRASH PUMP



This submersible centrifugal design requires no priming and can run dry all day without damage. Direct drive requires no maintenance as all moving parts are self lubricated with passing hydraulic fluid. A stainless steel body and impeller are very durable and capable of moving liquids containing up to 30% solids. If you are pumping oily sludge, septic systems, muddy trenches or even clean water this a pump for you.


The TP80 Trash Pump comes with a male 8" Cam Loc and a female Cam Loc adapter to 8" hose.





TP80

8" DISCHARGE SUBMERSIBLE TRASH PUMP

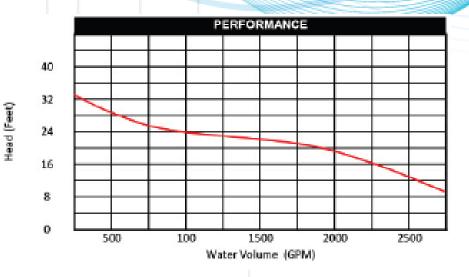

Testing was done in a controlled environment with a fixed discharge assembly using regulated pressures and flows. Results could vary in field conditions.

TP80 8" SUBMERSIBLE TRASH PUMP SPECIFICATIONS	
PUMPING CAPACITY	2700 gpm (10250 lpm)
PUMP TYPE	Trash-Sludge-Slurry-Water
CONSTRUCTION	Stainless Steel
DISCHARGE	8" Cam Loc
WEIGHT	65 lbs. (30 kg)
LENGTH	16 inches (415 mm)
WIDTH	12 inches (305 mm)
HEIGHT	23 inches (600 mm)
HYDRAULIC FLOW RANGE	19-23 gpm (72-88 lpm)
MAXIMUM PRESSURE	2500 psi (172 bar)
MAXIMUM BACK PRESSUR	RE 250 psi (17 bar)

Please Read the Manual

Order Yours Today 1-866-429-1730

